



Item No. \_\_\_\_\_

**MODEL: F2000**

**Dual Slicer**



The F2000 is a medium output fruit and vegetable slicer: 24 pieces per minute. The F2000 can slice, wedge, petal cut, core and cut vegetables into sticks using its changing heads and unique quick release latches. It has an easy detachable conveyor and also a divider pan to separate cores from various applications. The F2000 has a two button system for cycling the machine. This allows one person to load and operate the F2000.

#### **STANDARD FEATURES**

- Reversing switch for cutting head
- Double palm button operation for safety
- Slice, wedge, wedge/core, petal cut and sticks grid
- Easy blade change
- Cam action - constant slicing action
- Compact - fits in most working environments
- Divider pan available to separate cores
- Conveyor made in 1 meter or 2 meter lengths
- Up to 24 pieces per minute

#### **OPTIONAL FEATURES**

- Conveyor sequenced with cutter for convenience to package sliced products or continuous for bulk products

#### **Types of Applications:**

Tomatoes (slicing, wedging), potatoes (sticks, slicing), oranges (wedging, slicing), apples (coring, wedging), onions (minimum 3/8") (slicing, wedging), zucchini (sticks, slicing) and carrots (sticks).

#### **Technical Data:**

Motor - 1/2 HP  
Electrical -  
230V / 60Hz / 3 phase  
460V / 60Hz / 3 phase

#### **Dimensions:**

Height: 40 15/16 inches (variable depending on height of adjustable feet)  
Length: 22 9/16 inches  
Width: 18 5/8 inches  
Weight: 141 lbs  
Weight of conveyor: 36 lbs

#### **North Star Engineered Products**

Division of Glassline Corporation  
PO Box 1141  
Perrysburg, OH 43552  
[www.northstarengineered.com](http://www.northstarengineered.com)

**Phone:** (419) 726-2645

**Fax:** (419) 726-8583

**E-mail:** [sales@northstarengineered.com](mailto:sales@northstarengineered.com)



# MODEL: F2000 Dual Slicer

## UTILITY REQUIREMENTS:

### **Motor:**

1/2 HP

### **Electrical:**

230V / 60 Hz / 3 phase

460V / 60 Hz / 3 phase

## START/STOP:

Easy to use double palm buttons sequences one cycle to ensure optimal safety.

## CONSTRUCTION:

Made of durable rust resistant stainless steel to ensure cleanliness and to keep bacteria from forming. Plexiglass shielding to keep hands and other extremities from coming in contact with moving parts.

## SPECIFICATIONS:

- Slicing of relatively large vegetables and fruits such as tomatoes, onions, potatoes, peppers, apples, pears, and oranges.
- Wedging a variety of fruits and vegetables such as oranges, tomatoes, pears and apples.
- Cutting of sticks perfect for French fries, carrot sticks, or even pepper sticks.
- Wedge/Core feature for perfect apple wedges without the core. Includes core shoot to discard cores during cutting.
- The ability to cut two pieces with each stroke with up to 48 pieces per minute.

## CUTTING TABLES AND DETACHABLE PLUNGES:

There are a wide variety of different blades and plungers to choose from.

## • Blade Sets:



1/4" slice knives and plungers  
3/16" slice knives and plungers  
3/8" slice knives and plungers  
1/2" slice knives and plungers  
Others upon request.



4 wedge knives and plungers



8 segment wedge knives (without core) and plungers



8 segment wedge with core and plungers



12 segment wedge with core and plungers



16 segment wedge with core and plungers



Wedge blade mounting plate

Replacement blade

Sticks





## **Discharge belt:**

1 meter discharge belt

2 meter discharge belt

Continuous run or sequenced with cutting head.

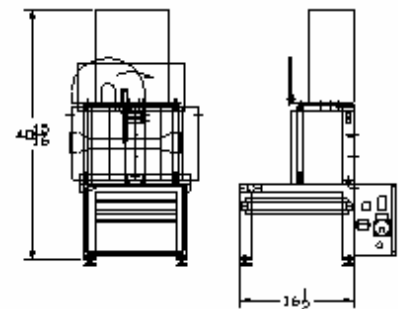

## **DIMENSIONS:**

Height: 40 15/16 inches (variable depending on height of adjustable feet)

Length: 22 9/16 inches

Width: 18 5/8 inches

Weight: 141 lbs

Weight of conveyor: 36 lbs

**North Star Engineered Products**  
**Division of Glassline Corporation**  
PO Box 1141  
Perrysburg, OH 43552

**Phone:** (419) 726-2645

**Fax:** (419) 726-8583

**E-mail:** sales@northstarengineered.com